

HIGH PERFORMANCE, LOW MAINTENANCE.

## A Natural Fit.



EcoShield Rolling Windows are built on precision-calibrated rollers, for long life and smooth fingertip operation. They're ideal for porches, family rooms and multi-family dwellings. Both sash are easily removed for easy cleaning and our ST Glazing Package meets or exceeds Energy Star guidelines. That makes the 2800 Series Rolling Window a proven performer in Housing Authority and Condominium Association applications.


### Standard Features

- Precision Calibrated Rollers
- Interlock at Meeting Rail
- Sash can be Removed for Easy Cleaning
- Fiberglass Half Screen
- Double Locks Over 28" Height

### Performance Options

- Fiberglass Full Screen
- ST Stimulus Approved Glazing Package
- Flat, Profile or SDL Grid Package
- White, Beige and Bronze/White Color
- Foam Frame Wrap
- Integral Nail Fin / J-Channel
- Extension Jamb Package

## 2800 Rolling Window

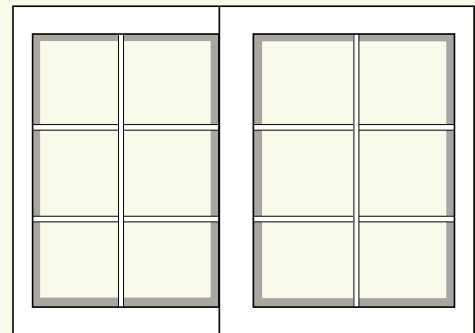

NFRC Thermal Performance Data - 2800 Rolling Window Without Grids

Glass Type		U-Value	SHGC	VLT	CR
ST Stimulus	Clear-Argon-Low E- HP Spacer	0.29	0.29	0.56	62
Supra	Clear-Argon-Low E	0.31	0.29	0.56	58
HP Low E	Clear-Air-Low E	0.34	0.30	0.56	55
Clear	Clear-Air-Clear	0.48	0.64	0.66	44

