

HIGH PERFORMANCE, LOW MAINTENANCE.

A Natural Fit.



Advanced engineering and materials make the EcoShield Windows 2800 one of the best values on the market today. Built with rugged 100% 1st generation PVC, the top sash is fixed, for added protection against air infiltration, and outstanding thermal performance.


Standard Features

- Welded sash and frame
- Fully weather-stripped interlock
- Bottom sash tilts in for easy cleaning
- Fiberglass half screen
- Sloped sill with interlocking leg
- DP 35 rated
- Available in Rolling, Picture window and Hopper
- 3" frame depth

Performance Options

- Energy Star U-4 glazing packages
- DP 50 commercial upgrade
- Multiple colors available
- Profile grid package
- Foam frame wrap

2800 Single Hung

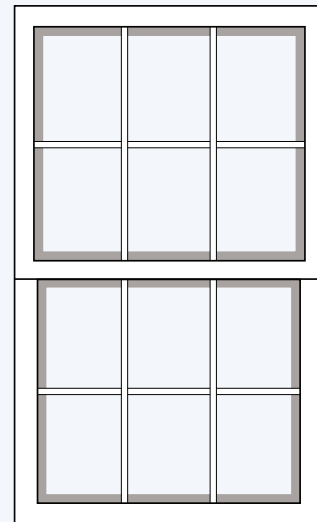

NFRC Thermal Performance Data — 2800

Glazing	U-Value	SHGC	VT
Energy Star U4	0.25	0.28	0.49
Low-E Argon	0.29	0.29	0.53
HP Low E	0.33	0.29	0.53
Clear	0.47	0.63	0.65

