

HIGH PERFORMANCE, LOW MAINTENANCE.

## A Natural Fit.



Advanced engineering and materials make the EcoShield 280 one of the best values on the market today. Built with rugged 100 percent first generation PVC, the top sash is fixed, for added protection against air infiltration, and a high thermal rating.

### Standard Features

- Welded sash and frame
- Constant force balancing system
- Fully weather-stripped interlock
- Bottom sash tilts in for easy cleaning
- Fiberglass half screen
- Sloped sill with interlocking leg
- DP 35 rated
- Aluminum reinforced meeting rail
- Available in Rolling, Picture window and Hopper
- 3" frame depth


### Performance Options

- Energy Star glazing packages
- DP 50 commercial upgrade
- White, beige and bronze/white color
- Profile grid package
- 3" frame depth

### Builder Features

- Integral nail fin
- Integral nail fin and J-channel
- 3" Cambridge flat casing
- 4 9/16" pre-primed or clear extension jamb
- 6 9/16" pre-primed or clear extension jamb

## 280 Single Hung

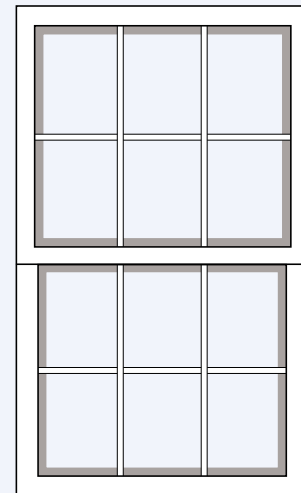

### NFRC Thermal Performance Data — 280

Glazing	U-Value	SHGC	VT
Energy Star U4	0.25	0.28	0.49
Low-E Argon	0.29	0.29	0.53
HP Low E	0.33	0.29	0.53

