

HIGH PERFORMANCE, LOW MAINTENANCE.

## A Natural Fit.



The EcoShield 4000 line unites elegance and performance in a single, highly-efficient system. Engineered for strength and durability, with high-end features typically found only in the most expensive premium lines, the 4000 vinyl replacement window delivers superior value.


### Standard Features

- Thermal Fusion Welded Frame and Sash
- Sleek Slimline Sash Profile
- Quad Weather-Stripping at key contact points
- Block and Tackle Balance System
- 3¼" Frame Depth
- Available in Rolling, PW and Hopper
- Full Length Lift Handles
- Locking Half Screen
- Approved Forced Entry Locking System
- Sash Tilt In for Easy Cleaning
- Double Recessed Meeting Rail Locks
- DP 50 Rated
- Interlocking Sloped Sill
- Dual Night Latches

### Performance Options

- ST Stimulus-Approved Glazing Package
- .21 U-Value DOE-R5 Triple Glass Package
- DP 65 Upgrade
- Egress Hardware
- Multi Unit Mullion Package White, Beige and Bronze/White Colors
- Cherry, Light and Dark Oak Simulated Woodgrain Interior
- 14 Exterior Decorative Colors
- Flat, Profile or SDL Grid Package
- Foam Frame Wrap

## 4000 Double Hung

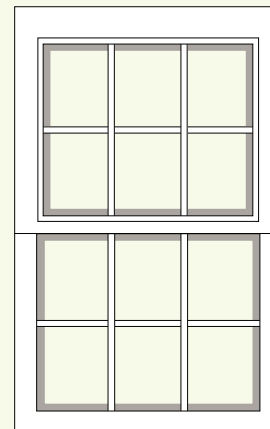

### NFRC Thermal Performance Data - 4000 Double Hung Without Grids

Glass Type		U-Value	SHGC	VLT	CR
DOE - R5 - Triple	Argon/Argon - Low E/Low E	0.21	0.21	0.39	71
ST Stimulus	Clear-Argon-Low E-HP Spacer	0.29	0.26	0.49	58
Supra	Clear-Argon-Low E	0.30	0.26	0.49	55
HP Low E	Clear-Air-Low E	0.34	0.26	0.49	52
Clear	Clear-Air-Clear	0.45	0.56	0.58	44

