

HIGH PERFORMANCE, LOW MAINTENANCE.

A Natural Fit.



The EcoShield 700 new construction vinyl window is engineered for easy operation and maximum ventilation, and styled to fit almost any décor. Multi-point locking provides added security, and all are available in single and multi-unit combinations.

Standard Features

- Fusion Welded Frame and Sash
- Multi-Point Locking System
- Double Weather-Stripping around Perimeter
- Sash Crank Out 90 Degrees
- Fiberglass Full Screen
- Sturdy Truth E-Guard Hardware Package
- DP 50 Rated
- Available in Awning and Picture Window Styles
- Common Jamb - Two Wide


Performance Options

- ST Stimulus-Approved Glazing Package
- Egress Hardware
- White, Beige and Bronze/White Colors
- Flat, Profile or SDL Grid Package
- Multi Unit Mullion Package

Builder Features

- Integral Nail Fin
- Integral Nail Fin and J-Channel
- 3" Cambridge Flat Casing
- 4 9/16" Pre-Primed or Clear Extension Jamb
- 6 9/16" Pre-Primed or Clear Extension Jamb

7000 Casement/Awning

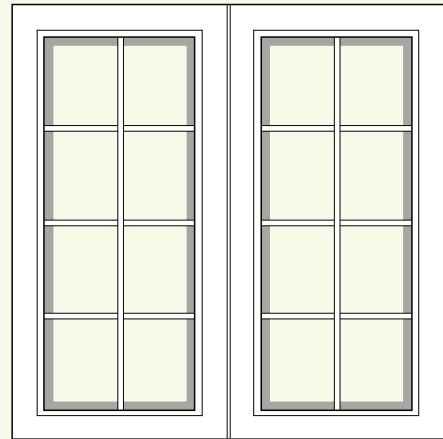

NFRC Thermal Performance Data - 7000 Casement Without Grids

Glass Type		U-Value	SHGC	VLT	CR
DOE - R5 - Triple	Argon/Argon - Low E/Low E	0.20	0.19	0.35	74
ST Stimulus	Clear-Argon-Low E- HP Spacer	0.27	0.24	0.46	64
Supra	Clear-Argon-Low E	0.28	0.24	0.46	61
HP Low E	Clear-Air-Low E	0.31	0.25	0.46	57
Clear	Clear-Air-Clear	0.42	0.52	0.54	45

