

HIGH PERFORMANCE, LOW MAINTENANCE.

## A Natural Fit.



The 100 Series Single Hung and 300 Series Double Hung feature an integrated brickmold trim package or a 3 1/2" vinyl trim. Both also serve as a J-channel pocket, for a clean look and easy installation.


### Standard Features

- Welded sash and frame
- Fiberglass screens
- Reinforced meeting rail
- Sloped sill with interlocking leg
- 100 SH: bottom sash tilts in/half screen
- 300 DH: both sashes tilt in/full screen
- 100 SH: frame depth 3"
- 300 DH: frame depth 3 5/8"
- Fully weather-stripped interlock
- Also available in Rolling, Picture window, and specialty shapes

### Performance Options

- Energy Star U-4 and Energy Star III glazing packages
- Profile or SDL grid package
- DP 50 upgrade for 100 SH and 300 DH
- Multiple colors available

## Brickmold Series 300 Double Hung

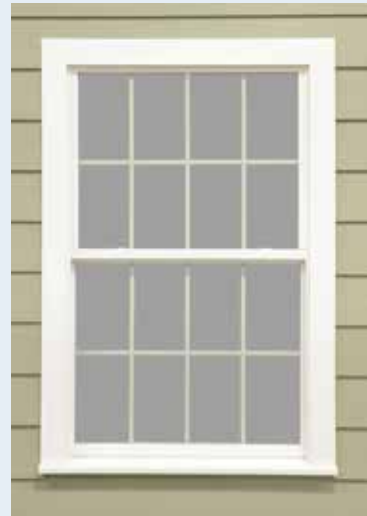

### NFRC Thermal Performance Data – 300

Glazing	U-Value	SHGC	VLT
Energy Star U-4	.24	.27	.49
Energy Star III	.27	.37	.52
Low E/Argon	.27	.28	.52
HP Low E	.31	.29	.52
Clear	.45	.63	.64