

HIGH PERFORMANCE, LOW MAINTENANCE.

A Natural Fit.



The EcoShield 3200 is one of the industry's smoothest, best performing patio doors, at any price. It's reinforced at key points with heavy-duty aluminum, for maximum rigidity, and with the ST Glazing package meets or exceeds the latest Energy Star guidelines.



Standard Features

- Sill Design Engineered for Excellent Drainage
- Integral Nail Fin and Screen Track
- Aluminum Screen Frame with Fiberglass Mesh Screening
- One Rolling and One Stationary Panel
- Interlocking Meeting Rail
- Adjustable Nylon Rollers
- Dual Point Locking Hardware

Performance Options

- ST Stimulus-Approved Glazing Package
- 5, 6, 8 Foot 2-Lite Styles
- 9, 12 Foot 3-Lite Styles
- Multi Point Locking Hardware
- Brass Finish Hardware
- Field Applied Extension Jamb
- 4 9/16" or 6 9/16" Pre-Primed or Clear Extension Jamb
- Flat or Profile Grid Package
- White, Beige and Bronze/White Colors

3200 Patio Door

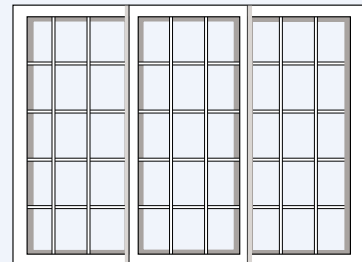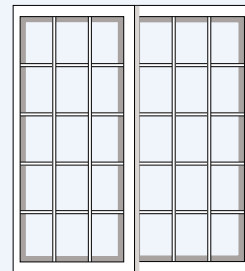

NFRC Thermal Performance Data - 3200 Patio Door Without Grids

Glass Type		U-Value	SHGC	VLT	CR
ST Stimulus	Clear-Argon-Low E-HP Spacer	0.29	0.29	0.55	55
Supra	Clear-Argon-Low E	0.31	0.29	0.55	47
HP Low E	Clear-Air-Low E	0.35	0.29	0.55	45
Clear	Clear-Air-Clear	0.47	0.62	0.65	38

